Profile KOZEL-10

Ref. C1575

- Mounting to drywall
- Minimum height
- No collision with the ceiling structure
- Line of light flush with the surface
- Non visible aluminum elements

APPLICATION

- decorative lighting

MONTAGE

- in drywall, with mounting adhesive
- can be easily connected into runs

ADDITIONAL INFORMATION

- in order to protect the lighting fixture during installation, a TECH-10 protective insert should be used
- possibility of smooth transition from an in-ground into a facade lighting fixture

TECHNICAL DRAWING

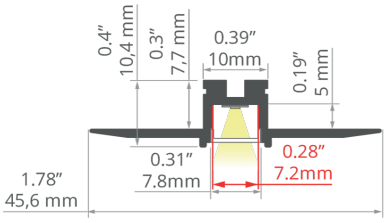

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	silver non anodized
With the possibility of sealing up to IP	20
Possible shapes of the luminaire	polygonal
LED gluing width A	7.8 mm
Width	45.6 mm
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Main lighting	yes
Decorative lighting	yes
Functional lighting	yes
Mounting to drywall	yes

Length	Ref
1000 mm	C1575NA_1
2005 mm	C1575NA_2
3010 mm	C1575NA_3

Profile KOZEL-10

Ref. C1575

To cover with plaster	yes
Wire out back of extrusion	yes

SAMPLE PROJECTS

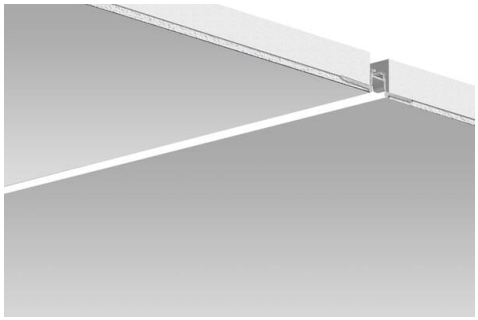

COVERS

NAME	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
PIKO	PMMA	57	frosted	17034

END CAPS

NAME	MATERIAL	COLOR	REF.
PIKO-ZM	ABS	gray	24307
		black	24384
PIKO-ZM-OTW	ABS	gray	24359
		black	24400

OTHER ACCESSORIES

CONNECTOR
ZM-NA-90
42723

CONNECTOR
ZM-NA-135
42725

CONNECTOR
ZM-NA-PION-135
42727

CONNECTOR
ZM-NA-PION-90
42726

CONNECTOR
ZM-NA-45
42339

Profile KOZEL-10

Ref. C1575

CONNECTOR
ZM-NA-PION-120
42321

CONNECTOR
ZM-NA-PION-60
42317

CONNECTOR
ZM-NA-PION-45
42315

CONNECTOR
ZM-NA-60
42305

CONNECTOR
ZM-NA-180
42724

PROTECTIVE INSERT
TECH-10
17126