



1. Insert the springs into the channels in the extrusion.

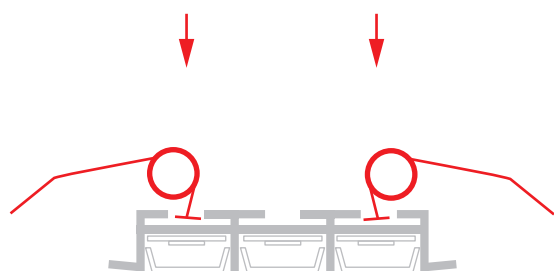

2. Insert the extrusion into the groove bending the spring arms towards each other.

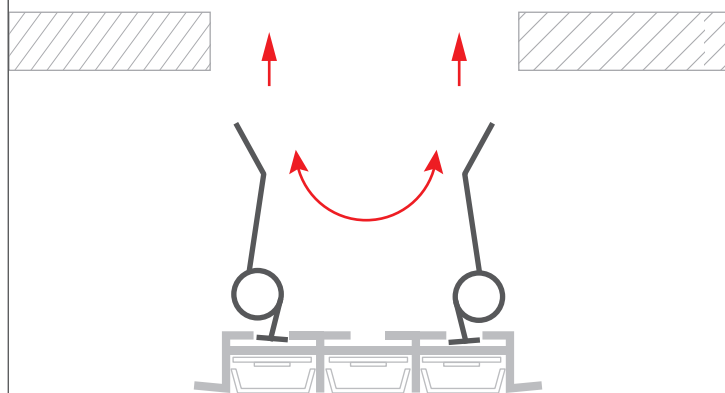

NOTE! A list of products corresponding with the selected accessories is available at www.klusdesign.eu/uk.